



Hopkins County


CONTRACTOR IS RESPONSIBLE FOR MAINTAINING TRAFFIC CONTROL AS SET FORTH IN THE TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS

Hopkins County Notes: Bore only no trenching and the conduit placement should be the backside of ditch away from the county road when running parallel to the CR


Project consist of approximately 505' of Underground fiber

GENERAL CONSTRUCTION NOTES


1. ALL CONSTRUCTION WORK WITHIN THE PUBLIC RIGHT-OF-WAY SHALL BE DONE IN ACCORDANCE WITH THE ORDINANCES AND REGULATIONS OF THE MUNICIPALITY IN WHICH THE WORK IS TO BE PERFORMED.
2. THE CONTRACTOR SHALL MAINTAIN TRAFFIC CONTROL THROUGHOUT THE CONSTRUCTION PERIOD. TRAFFIC CONTROL MEASURES FOR WORK ON THE PROJECT WORK SITE SHALL BE SUITABLE TO AND MAINTAINED AT ALL TIMES THROUGHOUT THE CONSTRUCTION PERIOD.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONDUCTING ALL DEPARTMENTS WITHIN THE MUNICIPALITY AND THE UTILITY COMPANIES AT LEAST TWO WORKING DAYS PRIOR TO THE COMMENCEMENT OF WORK. CALL BEFORE YOU DIG.
4. IT SHALL BE THE RESPONSIBILITY OF THE CONSTRUCTION CONTRACTOR TO AVOID DAMAGE TO EXISTING AND PUBLIC PROPERTY. BY RESTORE ALL AREAS AFFECTED BY THE CONSTRUCTION TO ORIGINAL OR BETTER CONDITION.
5. BARRICADING AND TRAFFIC CONTROL SHALL BE THE RESPONSIBILITY OF THE CONSTRUCTION CONTRACTOR AND SHALL BE MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD. THE CONSTRUCTION CONTRACTOR IS RESPONSIBLE FOR PROVIDING TRAFFIC SAFETY MEASURES FOR WORK ON THE PROJECT WORK SITE SHALL BE SUITABLE TO AND MAINTAINED AT ALL TIMES THROUGHOUT THE CONSTRUCTION PERIOD.
6. EXPLANATION: THE CONSTRUCTION CONTRACTOR SHALL PROVIDE ALL NECESSARY SAFETY SYSTEMS THAT COMPLY WITH ALL LOCAL ORDINANCES AND REGULATIONS. THE CONSTRUCTION CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL ALL OTHER SAFETY MEASURES IN ANY REMAINING SITUATION.
7. ALL CONDUIT SHALL BE PLACED WITH A MINIMUM 42" OF COVER UNLESS OTHERWISE SPECIFIED.
8. ALL REINFORCING STEEL AND OTHER BASES IN CONCRETS SHALL BE SUPPORTED AND MAINTAINED AT THE CORRECT CLEARANCES BY THE USE OF IRON CHAIRS OR OTHER APPROVED SUPPORT.
9. ALL CONDUIT MUST BE PLACED WITH A MINIMUM 42" OF COVER UNLESS OTHERWISE SPECIFIED.
10. ALL REINFORCING SHALL BE MECHANICALLY LAPPED IN SITS TO A DENSITY OF BARS INSPECTOR THE REQUIRED DENSITY WILL BE OBTAINED BY USING TAMPERS, HAMMERS OR ROLLING EQUIPMENT. LAPS MAY VARY ACCORDING TO THE TYPE OF REINFORCEMENT USED TO OBTAIN THE REQUIRED DENSITY. SAND AND DEBRIS FREE MATERIAL WILL BE USED FOR BRACKLE.

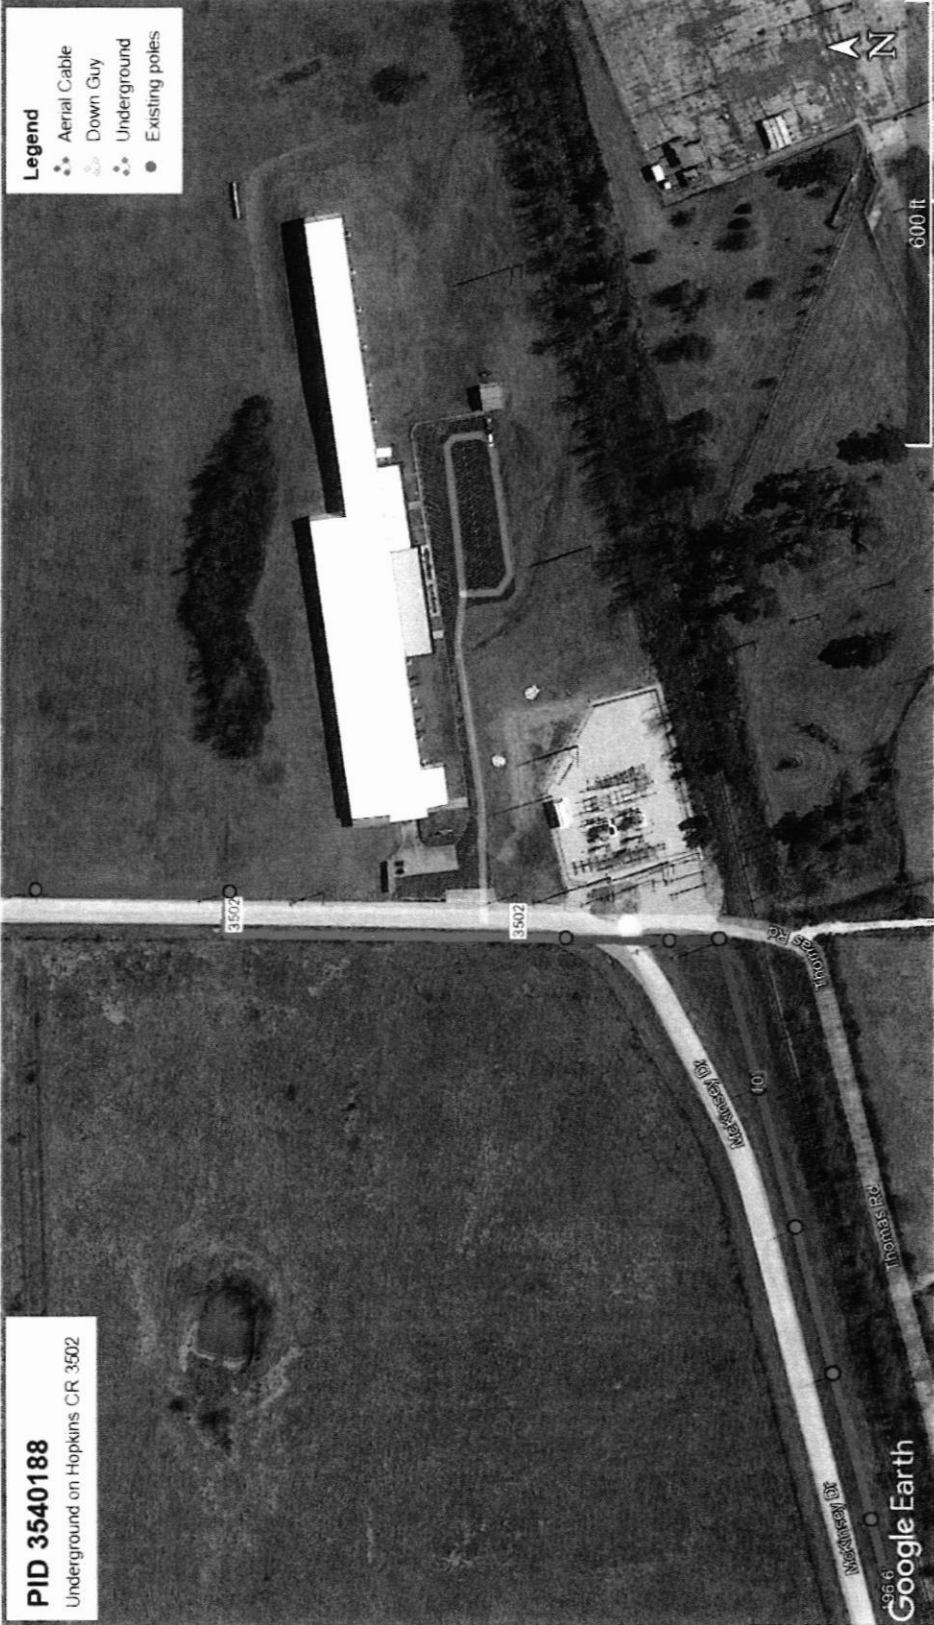

**PID 3540188**  
Underground on Hopkins CR 3502



UNDERGROUND CONDUIT 1-2" HDPE



PREPARED BY: DFW TELECOM, INC



1565 Chenault Street, Dallas, Texas 75228

September 12, 2022

Office of Hopkins County Judge  
PO BOX 288  
Sulphur Springs, Texas 75483

**Underground Parallel &/OR Crossing(s)  
Project PID 3540188**

Greetings,

Spectrum/Charter is requesting permission to construct and placement of underground conduit and fiber. This request is for proposed construction county road 3502, which is located in Hopkins County, Texas.

Site location map and google plans are enclosed. The construction plans detail the proposed work.

If you have any questions, please contact me at any time.

Sincerely,

*Darrin Wallace*

Project Coordinator  
[Darrin.wallace@charter.com](mailto:Darrin.wallace@charter.com)  
Phone 214-288-9549

Summited by:

Dayna LaPoma / Jessie Hatley  
Project Coordinator / RDOF Coordinator  
[Dayna.lapoma@dfw-telecom.com](mailto:Dayna.lapoma@dfw-telecom.com)  
[Jessie.hatley@dfw-telecom.com](mailto:Jessie.hatley@dfw-telecom.com)

Enclosures

County Approval Section:

Approved:  Denied:   
Authorized Signature: *Wade Bentley* Date: 9-22-22



1565 Chenault Street, Dallas, Texas 75228

September 13, 2022

Office of Hopkins County Judge  
PO BOX 288  
Sulphur Springs, Texas 75483

**Underground Parallel &/OR Crossing(s)  
Project PID 3366308**

Greetings,

Spectrum/Charter is requesting permission to construct and placement of underground conduit and fiber. This request is for proposed construction county road 4744, which is located in Hopkins County, Texas.

Site location map and google plans are enclosed. The construction plans detail the proposed work.

If you have any questions, please contact me at any time.

Sincerely,

*Darrin Wallace*

Project Coordinator  
[Darrin.wallace@charter.com](mailto:Darrin.wallace@charter.com)  
Phone 214-288-9549


Submitted by:

Dayna LaPoma / Jessie Hatley  
Project Coordinator / RDOF Coordinator  
[Dayna.lapoma@dfw-telecom.com](mailto:Dayna.lapoma@dfw-telecom.com)  
[Jessie.hatley@dfw-telecom.com](mailto:Jessie.hatley@dfw-telecom.com)

Enclosures

County Approval Section:

Approved: \_\_\_\_\_ Denied: \_\_\_\_\_

Authorized Signature:  \_\_\_\_\_ Date: \_\_\_\_\_