



April 22, 2026

Hopkins Couty Courthouse

118 Church st

Sulphur Springs, TX 75482

New Underground installation and Overhead installation at County Road 2307.

Project WO Number: 26981359

Oncor Electric Delivery LLC., is requesting permission to open cut County Road 2307 to install perpendicular approx. 30 ft of 4x 6" PVC pipes which will be concrete encased, then 20 ft of 2x 6" concrete encase PVC Pipe parallel to the road to an existing wooden pole in ROW. Please see attached map for details on this. Oncor will ensure the road is restored to the same condition it currently is, as well as provide proper traffic control and a steel plate which cars can drive on top of the trench to ensure access to the road is available. Total time to install facilities and restore the road should be 4 days. And road will stay drivable throughout these 4 days. This project is to decommission the existing Martin Springs Substation and transfer load to the new Jennings Lake Substation to ensure future capacity for the developing Hopkins county area.

Site construction work prints are seen below.

If there are any questions or concerns please contact me at your availability.

Stanley Ngo


Engineer



Stanley.Ngo@oncor.com

(469) 261-5407

County Approval Section

Approved: ✓ Denied:

Authorized Signature:  Date: 4-28-26

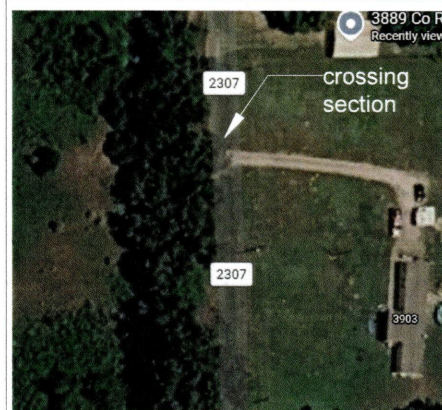

JENNINGS LAKE SUB HOPKINS COUNTY										ESTIMATE		DWG TYPE			
PERMIT REQUEST															
3850 Co Rd 2307 Sulphur Springs TX 75482															
2025JNSUN001										REV 0		J-B-I			
SHEET NO		DATE: 04/22/20		W.A. NO		DATE		REVISION		DESCRIPTION		DWG CH		APP	
		DATE: 04/22/20		W.A. NO		DATE		REVISION		DESCRIPTION		DWG CH		APP	